FILM & DIGITAL TIMES

Art, Technique and Technology in Motion Picture Production Worldwide



FILM DIGITAL TIMES

Art, Technique and Technology

Film and Digital Times is the guide to technique and technology, tools and how-tos for Cinematographers, Photographers, Directors, Producers, Studio Chieftains, Camera Assistants, Camera Operators, Grips, Gaffers, Crews, Rental Houses, and Manufacturers.

It's written, edited, and published by Jon Fauer, ASC, an award-winning Cinematographer and Director. He is the author of 14 bestselling books—over 120,000 in print—famous for their user-friendly way of explaining things. With inside-the-industry "secrets-of the-pros" information, *Film and Digital Times* is delivered to you by subscription or invitation, online or on paper. We don't take ads and are supported by readers and sponsors.

Webmaster: Jon Stout. Contributing authors and editors: Seth Emmons, Danys Bruyère, Iain Neil, Jon Maxwell, Sarah Priestnall, Jacques Lipkau-Goyard, Leigh Nofi, Ryan Kamata, Peter Crithary, Marc Shipman-Mueller, Brett Gillespie, Chuck Lee, Tobias Brandstetter, Les Zellan, Stephanie Hueter, Tim Spitzer, Ricardo Madan, Howard Preston, Kavon Elhami, Tom Fletcher, Jon Thorn.

Contributing photographers: Mark Forman, Evan Davies, Oli Laperal, Jr, J.A. Tadena, Raffy Francisco, Dorian Weber, Gunnar Mortensen, Jon Fauer, ASC, Pauline Maillet.

© 2014 Film and Digital Times, Inc. by Jon Fauer

Film and Digital Times On Paper, Online, and On iPad

iPad and iPhone

Get Film and Digital Times for iPad and iPhone on the Apple Newsstand. Download our free app in the iTunes Store (search: Film and Digital Times). Get individual issues, back issues, or an annual subscription.

Print + Digital Subscriptions

Film and Digital Times Print + Digital subscriptions continue to include digital (PDF) access to current and all back issues online.

Digital (PDF) subscriptions

Digital (PDF) subscriptions include unlimited access to the current and all back issues. www.fdtimes.com/issues

FDTimes Customer Service

For subscription or account questions, please contact us by phone Monday—Friday, 9 am—5:30 pm EST.

Phone: 1-570-567-1224
Toll-Free (USA): 1-800-796-7431
Fax: 1-724-510-0172
Email via website: fdtimes.com/contact

Mailing address: Film and Digital Times Subscriptions

PO Box 922

Williamsport, PA 17703 USA

Our editorial offices are in New York City.

FDTimes Issue 61 Contents

Preston Light Ranger 2	3
Above and Below the Line: How the Light Ranger 2 Works	4
Autofocus with Light Ranger 2	5
How to Connect the Light Ranger 2	5
Leica Camera Returns to Wetzlar	6
Leica T	7
Still Moving Pictures: E. Gunnar Mortensen, Leica Monochrom	8-9
Sony F55 Doc Dock	10
Sony a7S	11
Blackmagic URSA	12-13
Interview with Dan May, President of Blackmagic Design	14-15
Y. Imaoka and T. Hibi on designing the Canon 17-120	
AJA CION 4K Camera	
Interview with AJA's Jon Thorn	
ARRI Amira at NAB	21
How to Desqueeze Anamorphic	22
Anamorphic Desqueeze with DaVinci	
Aesthetic Role of Depth of Field in Anamorphic Cinematography.	24
Codex Lens Mapping Database	
Scorpiolens Anamorphics Barcelona Test	
"A Walk in Barcelona" (cont'd)	
Camtec Vintage Spherical Prime Test	
Angénieux at NAB	
Angénieux at Cannes	30
ZEISS at NAB	31
Fujinon Cabrio 25-300	32
RED R-90	33
Element Technica EVF Clutches	33
New Mo-Sys Heads	34
CINEVERSE	34
ARRI L5 LED Fresnels	35
Matthews Minivator II	
Lowel LEDs	35
West Coast Camera Rentals	36
Denz	37
Vocas	37
Schneider Xenon FF Primes	37
Clairmont Camera	37
Birns & Sawyer 60th Anniversary	38
Schulz Quickfix System	38
Band Pro 30th Anniversary 4K "Samsara" Screening	39
Samsara	
Panavision Primo 70 Series	40
SHAPE ISEE	40
NAB Review	41-45

Cover: Preston Cinema Systems Light Ranger 2

Zoran Veselic, Focus Puller to the Stars, with new Light Ranger 2 from Preston Cinema Systems, and Howard Preston on the monitor. Sony F55, Cooke S4/i lens, OConnor support from Keslow Camera. Transvideo Starlight Monitor.

Ubiquitous and busy Zoran Veselic is the only person so far to appear twice on the cover of Film and Digital Times.

Preston Light Ranger 2



Light Ranger 2 from Preston Cinema Systems could be the most important invention of the year for motion picture production.

Although FDTimes tries to follow the National Geographic style of subdued enthusiasm and avoidance of incendiary adjectives, this new focus tool is revolutionary. No focus puller will leave home without one...for each camera.

While audiences tolerated the taunts of Lars Trier's robotic camera operators, his experiments in neglecting focus had spectators heading for the exits. And that is why we have Gods of Focus: consummate professionals who maintain continuously sharp images while people and things move in moving pictures.

The job of pulling focus has evolved. Focusing with new digital cameras seems to be more critical. Sensors are more sensitive and resolution goes more K, Higher ISOs enable shooting in ever darker places, with fast lenses "wide open with a wrench." I think circles of confusion are shrinking: film may have been more forgiving than static CMOS sensors because the silver halide crystals were in constant motion and their random patterns may have provided more comfortable depth of field.

Currently there are three schools of pulling focus. 1: Watch by eye (use the Force). 2: Watch the monitor. 3: Get in the Zone (with the new Light Ranger 2).

Preston Cinema Systems Light Ranger 2 is an innovative tool that graphically divides a monitor into zones and intuitively guides your focus pulling in the correct direction.

The system consists of two units. The sensor unit sits atop the camera, preferably above the lens. Using parallax correction found in the on-screen menu, it can be placed anywhere that's convenient. A quick setting calibrates the offset.



1. Emitter bounces Infrared light off objects in the scene.

2. Bounced Infrared beam is captured by the detector array behind the LR2 lens.

The angle of the infrared beam is about 18° and its range is about 150 feet.

The Video Interface box attaches easily to the back of almost any monitor. It receives focus information from both the Light Ranger 2 and the Preston FIZ HU3 Hand Unit.

A beam of infrared light emitted by the Light Ranger 2 bounces off the objects and subjects in the scene, and is captured by the detector array behind the unit's lens. It's safe infrared. There are no lasers, no ultrasonic signals, no transponders attached to actors.

Light Ranger 2 works in harmony with Preston Wireless FIZ system HU3 hand unit and MDR3 motor driver. Plug the Serial port into your MDR3, power it up, aim, calibrate, and shoot.

You still control focus the way you always did. The same skills developed by years of muscular-neurological memory are applied. You still control speed, point of interest and splits.

The Light Ranger 2 divides the monitor into 16 zones, like a bar graph. Rectangles above the horizontal line show areas behind your established distance. Rectangles below are in front.


Things that are in focus are shown in green. The genius of all this is how intuitive it is to pull focus, because it graphically shows which way to turn the knob of your wireless FIZ hand unit. As Zoran Veselic, camera assistant (see cover) said, "this is a tool that can help, and we welcome any help we can get."

Howard Preston invented the original Light Ranger and patented it in January 1990. It was used on "Without Limits," "Thirteenth Warrior," "The Mighty Ducks," "Spiderman," "Benjamin Button", "The Patriot" and many commercials.

Preston Cinema Systems Light Ranger 2 is patent pending. It will cost under \$10,000, and should be ready to ship this September.

Worldwide: www.prestoncinema.com Europe: www.prestoncinema.eu

Above and Below the Line: How the Light Ranger 2 Works

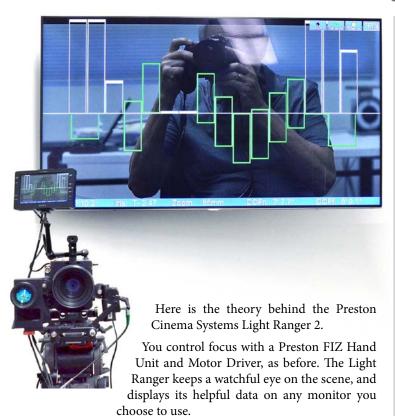

Many of us agree that video monitors are helpful in checking focus. But up to now, there were several challenges:

- Once you see buzzed focus, it's often too late.
- Sometimes it's difficult to tell whether you have to pull forward or backward to correct.
- Peaking doesn't tell us that much.
- On many episodic TV series, there often isn't enough room for the focus pullers, and they often work outside the set. On multiple camera shoots, there will be one monitor and one wireless focus unit for each camera and each assistant.

So, here's how the Light Ranger 2 works.


The graphic video overlay divides the video monitor into 16 zones. A horizontal bar runs across the middle of the screen.

The overlay shows 16 focus zones. It looks like a bar graph. Each zone has a white bar whose height indicates the distance and direction the subject is from the plane of focus. The zone color changes to green when the subject is within the lens depth of field.

Bars above the line are behind the plane of focus. Bars below the line are in front of the plane of focus. Green bars show areas that are in focus. They show your depth of field, automatically calculated by lens focal length, distance and T-stop.


The graphic overlay on the monitor shows the distance and the direction the subject is from the plane of focus: you don't need to compare lens focus setting to distance measurement.

Simple distance ranging mode shows distances for all 16 zones simultaneously when you want quick information or cannot run a focus tape.

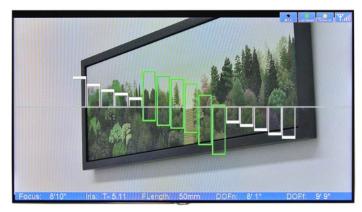

Bars above the line are behind the plane of focus. Bars below the line are in front of the plane of focus. Green bars show areas that are in focus. They also show your depth of field, automatically calculated by lens focal length, distance and T-stop.

Note the lens data in the blue bar at the bottom of the screen: Focus Distance actually set on the lens, Iris, Focal Length of lens, Depth of Field near distance, and Depth of Field far distance.

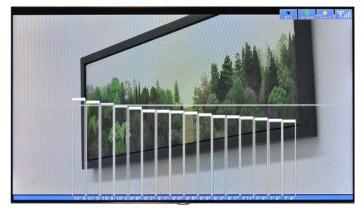

Simple distance ranging mode shows distances for all 16 zones simultaneously when you want quick information or cannot run a focus tape. Painting: "Golden Stairs," 1991, by Astrid Preston.



The original Light Ranger (at right) on location for "Without Limits" (1998). Director: Robert Towne. Cinematographer: Conrad L. Hall, ASC. First AC: Zoran Veselic.


Preston LR2 Autofocus

STOP THE PRESSES!

Fast action, no marks, no waiting? Insanely complicated camera moves? Help is on the way. We got this news as the presses were about to roll. Autofocus capability has just been added to the Preston Light Ranger 2.

Choose "Autofocus" in the HU3 main display. (It replaces the "Marks" selection.) Press the soft key (middle button). The lens will focus on the closest subject in the center third of the focus zones. A red rectangle overlays the image on the monitor to outline the Autofocus detection area.

Want to go from Autofocus to Manual? The monitor shows both the Light Ranger 2 distance measurement and your focus knob setting. Turn the focus knob to match the LR2 distance, press the Autofocus soft key again, and you'll return to manual control without a focus jump.

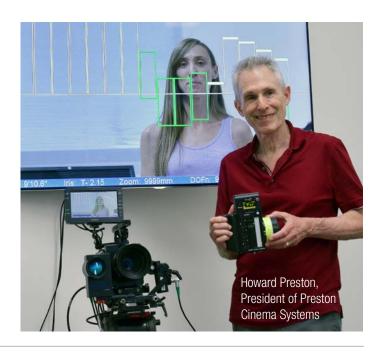

How to Connect the Light Ranger 2



1. Attach the Light Ranger 2 Sensor Unit on top of your camera. Aim it in the same direction as the optical axis of the lens. The LR2 has a 1/4-20 thread on the bottom for easy mounting to a mattebox bar, Schulz Quickfix, or Noga style arm.



2. Feed the 2-pin POWER connector with 10-30 V DC.

The SERIAL plug of the Light Ranger 2 connects directly to the SERIAL port of the Preston Motor Drive MDR3.





3. The Video Interface Receiver attaches to the back of your viewing monitor. It can connect in-line (BNC HD-SDI or HDMI). The video signal from the camera feeds "Video Input" and "Video Output" connects to the monitor.

Parallax correction of the Light Ranger 2 mounting position relative to the camera lens is controlled by the Video Overlay menu.

Preston LR2 Specs

Light Ranger 2 Sensor Unit

- Size: 3" x 5" x 1.5" case is milled from solid block of aluminum
- Weight: 550 g Power: 10-32 VDC • Mount: 1/4-20 thread
- Connects to serial port of MDR3.
- Uses MDR3 wireless link to Video Overlay Module.

Video Interface Receiver Unit

- Size: approx 5" x 7" x 1" (future units may be smaller)
- · Inputs: HD-SDI or HDMI inputs from camera or wireless video receiver
- Outputs: HD-SDI or HDMI to monitor
- Receives data from MDR3 set to same wireless channel as MDR3 and HU3
- Power Input 10.5- 32 VDC

New Leica Camera HQ



Leica Camera AG is back in Wetzlar. On the 100th anniversary of Oskar Barnack's "liliput" still camera that used motion picture film, Leica inaugurated a new 291,000 square feet (6.6 acres) headquarters to accommodate 700 employees. (The company was in nearby Solms since 1986.)



Presentation of Key, L-R: Markus Limberger, COO; Ruud Peters, CFO; Alfred Schopf, CEO; Andreas Kaufmann, Chairman of Supervisory Board; Wolfgang Kisselbach, CEO of Leitz-Park GmbH.



Christian Skrein, Board Member of CW Sonderoptic (Leica Cine Lenses) surround by Magnum Photographers Elliott Erwitt (left) and Thomas Hoepker at the opening of Leica headquarters on May 22.



Latest state-of-the-art clean room for camera and lens assembly.



Measuring a Summilux-C aspheric to tolerance of .1 micron.

Leica T













One hundred years after the invention of the Ur-Leica, Leica Camera launched their new T-System. Milled from a solid block of aluminum, styled in collaboration with Audi Design, the Leica T is an APS-C format mirrorless camera with interchangeable lenses. I was fortunate to try a prototype briefly at NAB and a production model for two days in Wetzlar. It was almost as if the spirit of Oskar Barnack was smiling down on this latest, essentially elegant Leica camera, with intuitive iPhone-like touch controls, auto-focus, and sculptural design.

The Leica T (Typ 701) camera has a 23.6 x 15.7 mm CMOS 16.5 megapixel sensor. A Wi-Fi module enables remote viewing and trigger, and sends images to smartphones, tablets, and social media sites via the new Leica-T app for iOS devices. Adobe Lightroom is included as a free download after registering the camera on the Leica website.

Two new lenses are available: Leica Vario-Elmar-T 18-56 mm f/3.5-5.6 ASPH and Leica Summicron-T 23 mm f/2 ASPH. More to come. The lens mount is a new Leica T bayonet mount with electronic contacts. All Leica M-Lenses produced after 1954 can be attached with a Leica M-Adapter T. We're looking forward to PL-to-T mount adapters. ISO is Auto and 100-12,500. Shutter speeds are 1/4000-30 seconds. Video is 1920x1080 30p or 1280x720 30p. Autofocus has settings for single point, multiple point, spot, face detection and touchscreen auto.

Viewing is via a very sharp EVF or 3.7" TFT LCD touchscreen monitor. Familiar pointing, swiping and pinching gestures control functions, choices, reviewing, zooming, liking and sharing.

The Leica T-System is available beginning Monday, May 26th through Leica Stores, Leica Boutiques, and select Leica Dealers.



Still Moving Pictures: E. Gunnar Mortensen

E. Gunnar Mortensen, SoFT, is a focus puller ("Sharp Wit and Sharper Focus") and one of the founders of the Society of Focus Technicians ("When you want it Sharp go SoFT"). Gunnar took a Leica Monochrom on location a few months ago. He wrote:

This job was for GE, production company was MJZ, the Director was Dante Ariola and DP was Benoit Delhomme. It was for the Olympics. We were shooting in Santa Margarita at a huge ranch that has been around since the Spanish missions were built. It was at the midway point between two missions and was used as a base camp at night by the fathers before heading out the next morning. The picture at the bottom of the page was a Fruit of the Loom spot shot by Chris Probst. As for the Leica Monochrom camera, I was blown away about the subtle gradations that I could achieve by shooting natively black and white compared with converting color to black and white. It was quite astonishing. I processed it in Silver FX Pro. All shot at ISO 400 on a Summilux 50 mm lens, aperture usually 4.0, which as a focus puller is one of my favorite stops to shoot at.



